

AKAI

AK-BT117 GB

AK-BT117 BL

In-ear Wireless
Headphone

入耳式無線耳機


ワイヤレスステレオ
ヘッドフォン



Instruction manual
使用說明書

Please read this instruction manual and retain it for future reference.
Product specifications and design are subject to change without prior notice.

在使用本產品前，請先仔細閱讀本使用手冊，並保留使用手冊以供日後參考。
產品規格及外觀設計如有更改，恕不另行通知。

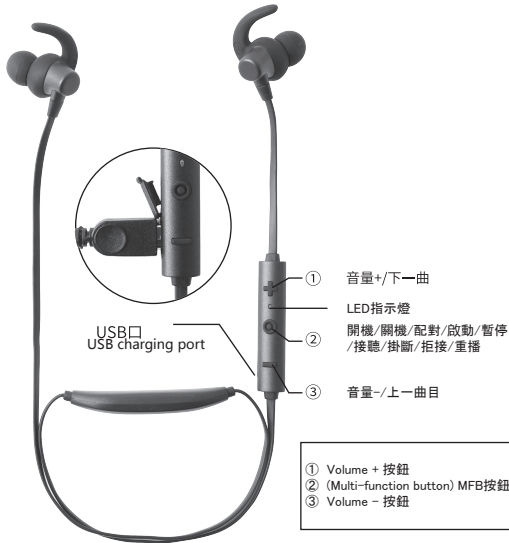

① 音量+/下一曲

LED指示燈

② 開機/關機/配對/啟動/暫停
/接聽/掛斷/拒接/重播

③ 音量-/上一曲目

- ① Volume + 按鈕
- ② (Multi-function button) MFB按鈕
- ③ Volume - 按鈕

開/關機、配對以及連接

1、開機

要求在關機狀態下，長按MFB鍵4秒，藍牙耳機將進入開機模式，藍牙耳機喇叭發出開機提示音，紅燈閃一次。

2、關機

要求在待機狀態下長按MFB鍵4秒，藍牙耳機將進入開機模式，藍牙耳機喇叭發出開機提示音，紅燈閃一次。

3、配對（鏈接AK-BT117）

在關機狀態下，長按MFB鍵4秒，藍牙耳機將進入開機模式，藍牙耳機喇叭發出開機提示音，開機後自動進入配對模式，藍紅燈交替快閃

4、Mute（送話閉音鍵）

在通話中，快速雙擊MFB鍵

使用藍牙耳機功能

1、接聽電話：當手機來電時，短按MFB鍵來接聽來電

2、掛斷電話：當藍牙耳機在通話狀態時，段按MFB鍵掛斷電話

3、拒接電話：當手機來電時，長按MFB鍵2秒拒接來電

4、重撥電話

要求藍牙耳機在待機或播放音樂狀態下，連續短按MFB鍵2次，藍牙耳機將自動重撥手機撥出的最後一組電話

5、音量調整

藍牙耳機在通話和播放音樂模式下，短按V+或V-鍵調節音量

(1)要求在音樂播放模式或通話式下，短按v+鍵，手機音量同步加大

(2)要求在音樂播放模式或通話模式下，短按V-鍵，手機音量同步減小

6音樂操作

播放：音樂播放時，短按MFB鍵1次，播放手機音樂

暫停：音樂播放時，短按MFB鍵1次，暫停播放手機音樂

上一曲：音樂播放時，長按V-鍵，播放上一曲音樂

下一曲：音樂播放時，長按v+鍵，播放下一曲音樂

產品及其配件包括

耳機x1，可替換耳帽x2，耳翼x1，USB充電線x1

藍牙耳機狀態指示燈

狀態	指示燈
關機狀態	紅、藍燈均熄滅
藍牙耳機開機時	藍燈閃 3 次
藍牙耳機關機時	紅燈閃 1 次
配對狀態	紅、藍燈交替閃爍
待機狀態	藍燈每 10 秒閃 1 次
低電待機狀態	紅燈每次 5 秒閃 1 次
充電狀態	紅燈長燈
充電完成	紅燈熄滅，藍燈亮
手機來電	藍燈每 10 秒閃 1 次

藍牙耳機磁力吸附功能 Magnetic Adsorption Function

藍牙耳機不在使用狀態時，可使用耳機磁力吸附功能將耳機環繞在頸

Built-in magnets let you easily stow your Earbuds by wearing them around your neck, a convenient way to carry around.



警告

- 1、使用配送的數據線為藍牙耳機充電，使用其他數據線會對藍牙耳機造成損壞。
- 2、藍牙耳機配有吸鐵石功能，如客戶體內有金屬板或電子設備，請諮詢醫生意見後，選購或使用該款藍牙耳機。

Caution:

- 1、Please charge the Bluetooth Earbuds with the original USB cable.
- 2、This Bluetooth Earbuds with Magnet inside. If customer has metal plate or electronic equipment in the body, please consult your doctor, before you use or buy this Bluetooth Earbuds.

產品規格

藍牙規格: V4.1

支持協議: A2DP、AVRCP、HFP、HSP

藍牙工作距離: Max 10 meters

充電電壓: USB 5V

阻抗: $32 \pm 15\%$ ohm

頻率範圍: 2.402GHz-2.480KHz

頻响: 20Hz-20Khz

電池容量: 80mAH 3.7V

麥克風靈敏度: -45 ± 3 dB

工作時長: 談話 : 5 hours / 音樂播放 : 4.5 hours

待機時長: 150 hours

充電時長: 1.5-2hours

1) Introduction the function of each button

Multi-Function Button (MFB)

Pause/Play Music (shortly press once)

Answer/End a call (shortly press once)

Reject a call (Press MFB for 2-3 Seconds)

Re-dial (shortly press twice)

Re-connection (shortly press once)

Pairing activation (long press until LED light flashes)

Micro USB charging Port

1.5~2.0Hours (Full power)

Volume Buttons

Volume +/- (shortly press)

Previous / Next song (long press to skip to previous/next song)

Indicator light

Red light: charging

Blue light: fully Charged

Red light flashes twice and voice prompts up: low battery

Red and blue light flashes alternately: pairing status

Blue light flashes every 5 seconds: standby status

Turn On (Press down MFB till blue light flashes)

Turn OFF (Press down MFB till red light flashes)

2) How to connect with a mobile phone?

1. Turn on AK-BT117
2. Long press multi-function button for about 5 seconds
3. When blue light flashes, keep pressing until red and blue light flashes alternately
4. Turn on Bluetooth of mobile, select pair name of headset "AK-BT117" to connect
5. When blue light flashes alternately it is connected successfully

3) How to connect with a computer?

1. Download a Bluetooth driver and install it
2. Insert a Bluetooth adapter / Open Bluetooth in computer
3. Power on Bluetooth headset and long press multi-function button around 5 seconds till red and blue lights flash alternately (pairing status)
4. Select pair name "AK-BT117" to connect
5. Initial password: 0000 (if applicable)

4) How to connect with two mobile phones?

1. Power on Bluetooth headset and long press multi-function button for about 5 seconds till red and blue lights flash alternately (pairing status)
2. Open Bluetooth of mobile phone A and to select pair name "AK-BT117" to connect

3. Long press multi-function button till red light flashes, turn off Bluetooth headset
4. Turn off Bluetooth of mobile phone A
5. Power on Bluetooth headset and long press multi-function button around 5 seconds till red and blue lights flash alternately (pairing status)
6. Open Bluetooth of mobile phone B and to select pair name "AK-BT117" to connect
7. Open Bluetooth of mobile phone A and re-connect to "AK-BT117"

Working range up to 10 meters

Please make sure all Bluetooth devices connected within 10 meters in an open area to avoid disturbance or disconnection

Reconnection

Option 1: Press multi-function button

Option: 2: Reconnect in mobile Bluetooth manual

Restore to default configuration

1. Long press multi-function button during charging
2. It restores to default config when red and blue light alternatively flashes 3 times

5) Trouble shooting

1. Unable to locate the pair name of headset?

Possible causes :

1. Bluetooth headset is not under pairing status
2. Bluetooth program error with Bluetooth headset
3. Bluetooth program error with mobile phone

Solution :

1. Turn on Bluetooth headset and long press multi-function button to activate Bluetooth pairing. (Blue and red light flashes alternatively)
2. Restore to default config
3. Restart mobile phone

Tips:

1. Pair status will be standby for 3 minutes pls connect within that period otherwise Bluetooth headset will power off automatically
2. During charging status press multi-function button for 5 seconds until blue and red light flashes 3 times
3. Clear up all Bluetooth pairing names in mobile phone after reboot

No sound from Bluetooth headset

Possible causes :

1. Bluetooth headset / mobile Volume too low
2. Not connected properly
3. Bluetooth headset is outside working range.

Solution :

1. Press “+” to volume up;
2. Re-connect it
3. Make sure it is within 10 meters in an open area.

Attention:

1. Volume up or down anytime during connection
 2. Do not use other function during pairing to avoid program error
- To get the best performance pls use it near the paired Mobile

Sound quality is not good.

Possible Causes :

1. WIFI is connected with mobile phone
2. Poor signal of mobile phone

Solutions :

1. Turn off WIFI;
2. Repair the Mobile phone

Tips:

1. WIFI disturbs transmission of Bluetooth headset
2. Poor signal will affect performance of Bluetooth headset

Red Indicator light is not on when charging.

Possible causes :

1. Bluetooth headset has not been used for a long time.

Solution :

After charged it for 30 minutes and see if it's on

Tips :

Overcharging, Bluetooth headset in a closed car in such a similar environment will reduce the battery capacity and lifetime

Specifications:

Bluetooth standard: V4.1

Bluetooth profiles: A2DP、AVRCP、HFP、HSP

Bluetooth working range: Max 10 meters

Charge voltage: USB 5V

Impedance: $32 \pm 15\%$ ohm

Frequency range: 2.402GHz-2.480GHz

Frequency response: 20Hz-20Khz

Battery capacity: 80mAH 3.7V

Microphone sensitivity: -45 ± 3 dB

Talk time: 5 hours / Music play back : 4.5 hours

Standby time: 150 hours

Charging time: 1.5 ~ 2 hrs (full power)

產品網上登記保養

Online Product Warranty Registration

<http://www.signeodesign.com/pages/warranty-registration>

數碼 / 影音產品保用証 Digital / AV Product Warranty Card

服務中心 Service Centre:

荃灣德士古道220-248號荃灣工業中心2305室

Room 2305 Tsuen Wan Industrial Centre, 220-248 Texaco Road, Tsuen Wan, N.T.

辦公時間 Office Hours:

星期一至五

Monday – Friday 9:00am – 12:30pm 2:00pm – 5:30pm

星期六、日及公眾假期休息

Saturday, Sunday and Public Holiday Closed

多謝閣下購買本公司之產品，請參閱下列保用條款：

1. 本公司為客提供由購機日起計之6個月免費保用服務。
2. 如需服務時，客戶必須出示保用証及有效之正本單據。
3. 此保用証如經塗改，一律無效。
4. 經本公司證實為正常使用情況下發生的損壞或故障，本公司將於保用期內提供免費維修服務。
5. 本公司將不會為任何間接或相應的損失、資料的損失或利潤的損失負責。
6. 此保用証只適用於香港特別行政區範圍以內。
7. 本公司擁有本保用証的發出及終止權。

Thank you for your purchase of our products. Please read the following terms and conditions:

1. Our company provides a six-month warranty from the date of purchase.
2. Customer must present a valid original invoice and warranty card.
3. Any alteration to this warranty card will be invalid.
4. For product defects under normal circumstances and at the discretion of our Company, our Company will provide free of charge repair service.
5. Our company will not be responsible for any indirect or consequential loss, loss of data or loss of profits.
6. This warranty card is effective within Hong Kong SAR only.
7. Our company has the right to issue or terminate this warranty card.

查詢電話 Hotline: 2428 2309 電郵 Email: support_av@signeo.net

注意：顧客請保留此保用証和購買發票，並需在檢查維修時出示，否則保用無效。

Note: Please keep and present this warranty card and purchase invoice when services are rendered, otherwise this warranty will be not valid

保 用 証
Warranty Card

香港地區
HK Area